

REVISION: Updated Format, Content &amp; Notes

APPROVED BY: Cesar Ancheta

PREPARED BY: JRS

REVISION DATE: 06/17/10













































APPROVED DATE: 08/30/10

CHECKED BY:



# UGS

*ITEM SCHEDULE FOR RAINCROSS STREET LIGHT*

	<b>RAINCROSS LUMINAIRE ASSEMBLY &amp; CONCRETE STANDARD</b>					
	MANUFACTURER	QTY.	Spec.	DESCRIPTION	MANUFACTURER'S CATALOG No. & Notes	
	Ameron Inc. Pole Products Division.	1 ea.	4'8"	Raincross Luminaire: Aluminum structured square tubing (Sand Epoxy coated (M16)) 	9CT17-Raincross: • Complete with Raincross Top w/ Aluminum Ring & mounting hardware, Photocell Mounting cover & Concrete Standard Anchor bolts, Per manufactures drawing #. 	
	DISTRIBUTED THRU: Pacific Lighting Sales Inc. (949)597-1633 	QTY. 1 ea.	Spec. 17'6"	DESCRIPTION Concrete Standard: Concrete Aggregate (Salt & Pepper, Exposed Aggregate Finish With No Coating). 		
	<b>ALUMINUM BELL AND CLAPPER</b>					
	MANUFACTURER	QTY.	DESCRIPTION		MANUFACTURER'S CATALOG No. & Notes	
	McGraw Foundry Anaheim, CA (714) 635-8800 	1 ea.	Aluminum Bell: Cast Aluminum 		Supplied by City of Riverside Stock # 24973  • Items shall be sealed and "hard green" anodized "Mil-A-8625F Type III Class 2 (Aluminart)" 	
		QTY. 1 ea.	DESCRIPTION Clapper: Cast Aluminum 			
	<b>GLOBE FIXTURE</b>					
	MANUFACTURER	QTY.	DESCRIPTION		MANUFACTURER'S CATALOG No. & Notes	
	McGraw Foundry Anaheim, CA (714) 635-8800 	2 ea.	Aluminum Globe Fixture: Cast Aluminum 		Supplied by City of Riverside Stock # 24972  • Pre-drilled & tapped 1/4"-20 for mounting of Globe.  • Pre-drilled Ø.161" holes to match induction light assembly  • Items shall be sealed and "hard green" anodized "Mil-A-8625F Type III Class 2 (Aluminart)" 	
	<b>LAMP ASSEMBLY ( see work order for type of lamp assembly to be used)</b>					
	MANUFACTURERS	QTY.	DESCRIPTION	SIZE	MANUFACTURER'S CATALOG No. & Notes	
	Powerlux Corp 2588-F El Camino Real #333 (760) 727-2360 Contact: Ken Lau 	2 ea. 	Induction Light Assembly: QL 55W Retrofit Kit. 	120v 	PR55/850/120RI (100-120 voltage range) 	
				240v 	PR55/850/277RI (200-277 voltage range) 	
	M12 Engineering 16527 Beaver Rd. Adelanto, CA 92301 (760) 246-5213 	2 ea. 	High Pressure Sodium lighting Assembly Retrofit Kit. 	120v, 208v, 240v 	100 watt Assembly Cat. #: UKA 003-992-04 Bulb: HPS S54 (100w) Spec. 150 watt Assembly Cat. #: UKA 004-992-04 Bulb: HPS S55 (150w) Spec. * Make of bulbs must be from Sylvania, G.E. or Phillips. 	
	<b>POLY CARBONATE GLOBE</b>					
	MANUFACTURER	QTY.	DESCRIPTION		MANUFACTURER'S CATALOG No. & Notes	
	Roto-Lite, Inc. 82-879 Fleming Way. Unit D Indio, CA 92201 (760) 863-5800 Fax (760) 863-5999  Contact: Richard Judge	2 ea.	Bell Shaped Globe: 		Supplied by City of Riverside Stock # 24958  • City of Riverside to provide the mold. • Globe is to have a frosted finish 	
	<b>PHOTO CELL AND RECEPTACLE</b>					
	MANUFACTURERS	QTY.	DESCRIPTION	SIZE	MANUFACTURER'S CATALOG NUMBER	
	Photo Cell; See Catalog # 	1 ea.	120v P.C. 	1000w 	LAMPAS	SUN-TECH 
			240v P.C.	1000w	6240	DTL 
	American Electric Corp.	1 ea.	Twist lock P.C. Receptacle		PECR-247-KIT	



Revision



# RAINCROSS CONCRETE STREET LIGHT STANDARDS

UGS

REVISION: Updated Format, Content & Notes

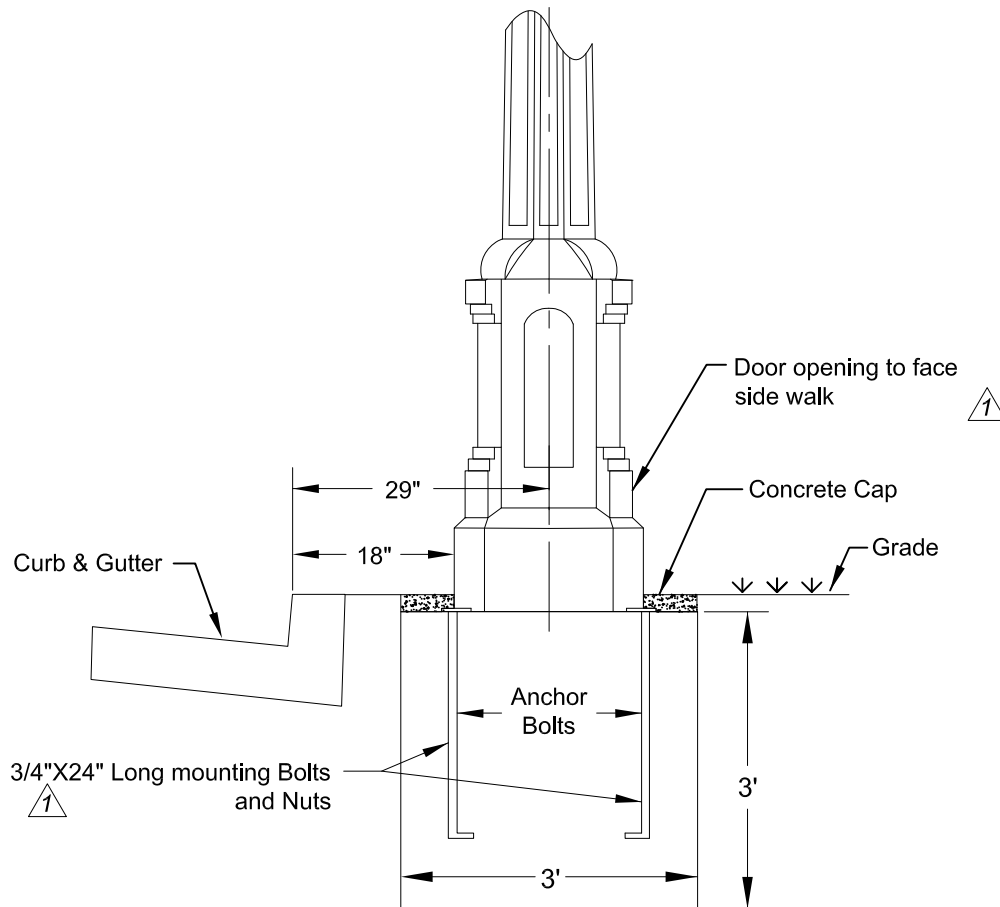
REVISION DATE: 06/17/10

APPROVED BY: *Cesar Ancheta*

APPROVED DATE: 08/30/10

PREPARED BY: JRS

CHECKED BY: DB



## TYPICAL RAINCROSS LIGHT STANDARD CROSS SECTION

(NOT TO SCALE)

